



1 foot scale on drawing border

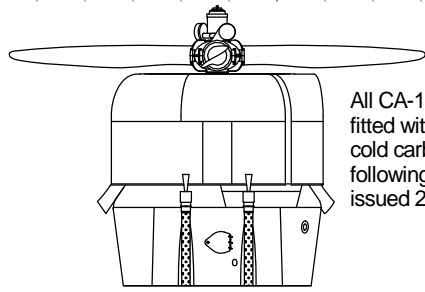


All CA-1 aircraft were progressively fitted with an improved air cleaner for cold carburettor and oil cooler air following Wirraway Order 108 issued 26/03/1943

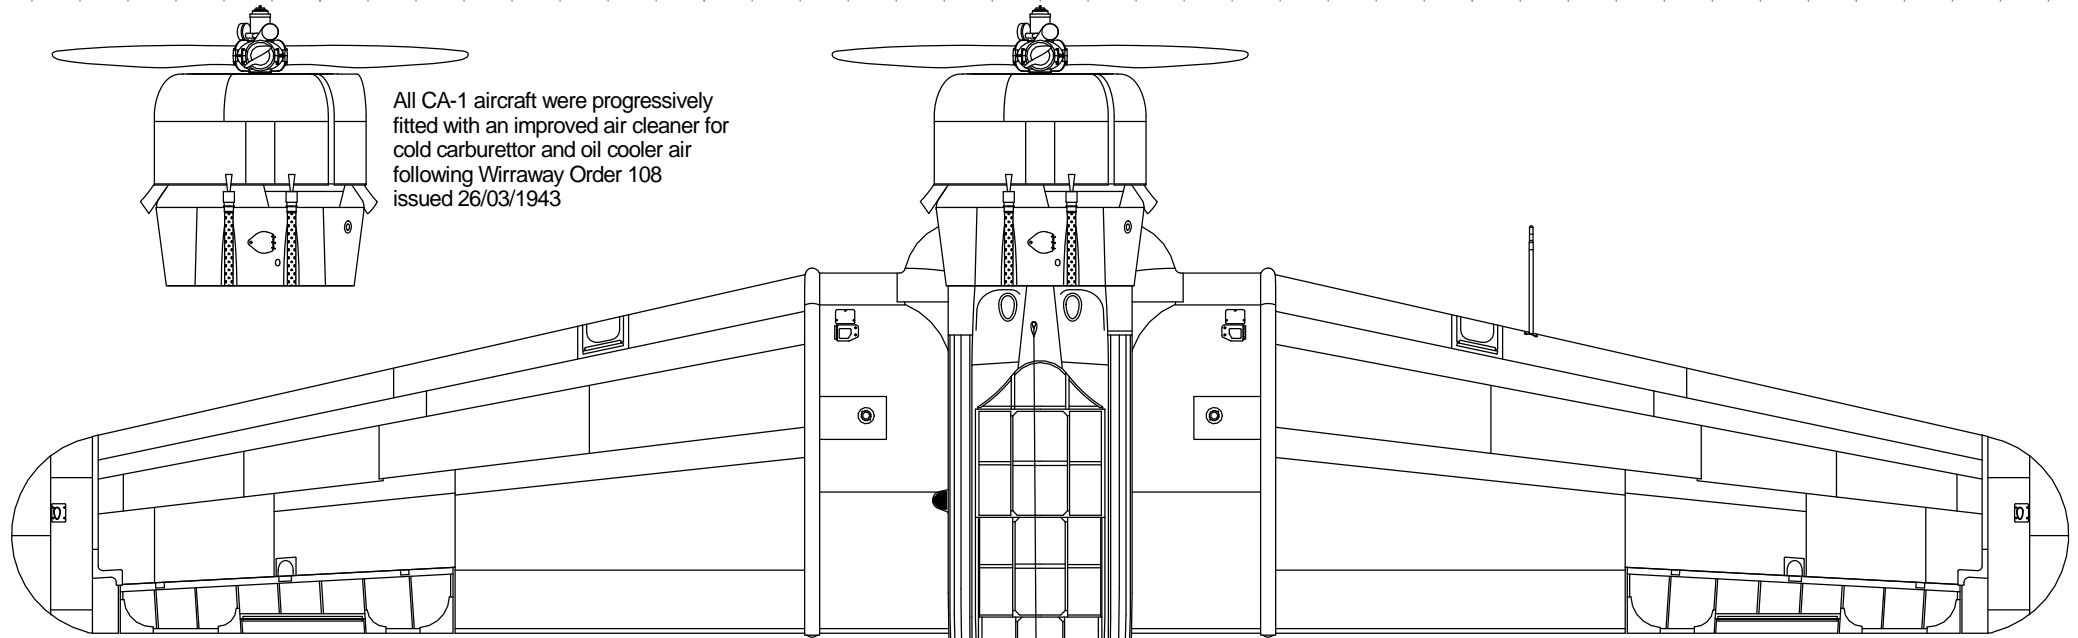


Fabric-covered ailerons, metal-covered trim-tabs

Smooth skin on horizontal stabilisers fitted to last 35 CA-1 aircraft

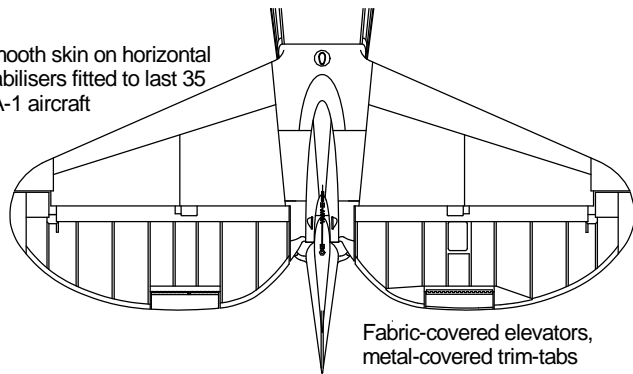

Fabric-covered elevators, metal-covered trim-tabs

Corrugated skin on horizontal stabilisers fitted to first 5 CA-1 aircraft\*

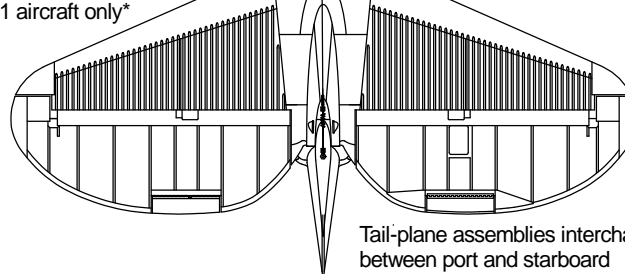

Tail-plane assemblies interchangeable between port and starboard

CA-1 Wirraway Specifications:

Crew	2	
Length	27 ft 10 in	8.48 m
Wingspan	42 ft 10½ in	13.07 m
Height	8 ft 8¾ in	2.66 m
Wing area	255¼ sq ft	23.76 m²
Empty weight	3,992 lb	1,810 kg
Maximum take-off weight	6,595 lb	2,991 kg
Performance:		
Maximum level speed	191 knots	350 km/h
Cruise speed	135 knots	250 km/h
Range	720 miles	1,200 km
Service ceiling	23,000 ft	7,010 m
Rate of climb	1,950 ft/min	9.9 m/s

\* It is possible that more than 5 aircraft were fitted with corrugated horizontal stabilizer skin. Some sources suggest up to 20, but photographic evidence shows C/N 19 (A20-21) with flush skin.

